



# Multi-Layer Perceptron based forecasting model of biomass and coal gasification

Nikolaieva Oksana<sup>1,\*</sup>

<sup>1</sup>Education and Pedagogical Sciences Department, Taras Shevchenko National University of Kyiv, Ukraine

## Highlights

- Multi-layer perceptron-based method for biomass gasification is developed.
- $CO_2$ ,  $CO$ ,  $H_2$  and  $CH_4$  percentage in output gas composition is forecasted.
- Effect of some input variables on the gas yield is assessed.
- A good agreement of modeling and empirical data is obtained.

## Article Info

Received: 29 May 2022

Received in revised: 2 July 2022

Accepted: 2 July 2022

Available online: 03 July 2022

## Keywords

Biomass gasification;

Fixed-bed downdraft gasifier;

Gas composition;

Model prediction;

Multi-layer perceptron neural network

## Abstract

In the present work, the multi-layer perceptron neural network is applied to model biomass gasification in the fixed-bed downdraft gasifier. Therefore, the multi-layer perceptron neural network is implemented to analyze and predict the gas composition in the outlet flow of the gasifier concerning the  $CH_4$ ,  $CO_2$ ,  $H_2$  and  $CO$  concentrations. On the other hand, the input data for the prediction includes biomass element content ( $C$ ,  $H$ , and  $O$ ), the value of the ash and moisture contents, and the temperature of the reduction zone. Extensive values which are derived from the experimental data are used to train the Multi-Layer Perceptron Neural Network. The obtained results from the model prediction show a satisfying agreement with the empirical data. The result of statistical analysis in the case of  $R^2$  values for  $CH_4$  and  $CO$  is higher than 0.99, and for the  $CO_2$  and  $H_2$  is higher than 0.98, which shows a good agreement between the experimental and predicted data. Also, a comparative study between MLP and other well-known methods demonstrates the superiority of MLP for gasification yield prediction. Hence, this model can be a useful tool for the analysis and performance evaluation of the gasifier modules.

## 1. Introduction

Environmental issues like air contamination and ecology destruction due to the utilization of fossil fuels have urged many nations toward using green and renewable energy resources [1,2]. In This regard, biomass, an accessible renewable energy source, is regarded as a sustainable framework for energy extraction. Biomass is one of the most significant sources of green, renewable, and sustainable energy which is sufficiently accessible [3]. There have been recognized a wide range of biomass resources, including wood and agricultural products (wood, logs, bark, and sawdust), solid wastes (municipal solid waste, garbage, industrial residues), etc. The major

contents of any biomass comprise cellulose, lignin, and hemicellulose [4]. Gasification of the biomass includes the partial oxidation changeover in a closed chamber to the gaseous product which is burned to release energy or utilized to value-added components generation [5]. Balat et al. [6], as well as Hosseini et al. [7], studied the biomass conversion into the hydrogen as a clean energy supply through different methods. Hydrogen has known as an environmental-friendly, pollution-free and promising supply for providing demanded energy in various applications [8]. Hydrogen provides a variety of application in many sectors such as utilization in vehicles, feeding as fuel to many power generation systems such as fuel cells (FCs), heating and

\* Corresponding Author: Nikolaieva Oksana  
Email: [Oksanabadz@yandex.ru](mailto:Oksanabadz@yandex.ru)

cooling aims, etc. [9]. The biomass conversion can be done for different aims such as hydrogen production, gas production, a mix of gaseous including,  $CH_4$ ,  $H_2$ ,  $CO$ ,  $CO_2$  within gasification process [10]. Investigating the gasification procedure function to enhance the gas production and component evaluation has been done in a wide range of literature. The gas composition in the product flow relies on the feedstock properties, the geometry of the gasification chamber, the content of the moisture in biomass, gasification medium, and the operational circumstances [11–15]. Amongst various gasification agents (steam, air, oxygen, etc.), air is regarded as the gasification media in the present work. Since the gasification process is an auto-thermal reforming procedure, it is possible to exploit the released heat from the exothermic reaction to supply the heat required for the endothermic reaction to continue the gasification process. The lower heating value (LHV) provided from the air gasification process is a value around  $4\text{--}7\text{ MJ}/Nm^3$  [16]. The gasification process can be split into four steps including, drying process, pyrolysis stage, combustion (oxidation) step, and char gasification (reduction) [17].

Many researchers have also been formulated the gasification process in different domains, including thermodynamic equilibrium modeling, kinetic modeling, computational fluid dynamic modeling, and using artificial neural networks [18–20] to assess the gasification performance criteria concerning the output gas composition, gas yield, and the produced gas values and qualities. Mahishi et al. [21] utilized the thermodynamic equilibrium formulation to forecast the output gas composition for the biomass gasification aims. They studied the effect of some important parameters, including the ratio of steam to biomass and the equivalence ratio of the hydrogen production rate. Karmakar et al. [22] used the kinetic modeling for the evaluation of the gasification process of the rice husk in the fluidized bed gasifier in the presence of the steam as the gasification agent. Xue et al. [23] present the computational fluid dynamic (CFD) model for the simulation of biomass gasification in the fluidized bed gasifier. The solid phase component equation was coupled with gaseous phase equations. Their modeling is applied for the gasification of the wood in the presence of the air. Mikulandrić et al. [24] applied neural network methodology to identify the gasification process parameters in two different types of gasifiers. Artificial neural networks depend on a great quantity of experimental data and utilize mathematical regression to make a correlation between the entering and exiting values [19].

Among the various mathematical models, the application of neural networks is regarded in the present work. Neural network-based models do not need the mathematical formulation of the system's phenomenon. Hence, neural networks become suitable for the parameter identification and prediction of the nonlinear formulation, especially in the case of the biomass gasification process [25]. Besides, neural network methodologies can provide a highly efficient forecast with the same input parameters or even fewer parameters compared to the different modeling approaches.





Neural network methodologies were widely applied in different fields such as signal processing, recognizing the patterns, simulation of the procedures, and nonlinear function evaluation [26]. Kalogirou [27] offered the artificial neural networks (ANN) methods as a promising scheme for predicting the key parameters in the energy systems. In the case of hydrogen yield, many researchers have been related to forecasting and optimizing the artificial neural network in hydrogen yields [28–31]. Besides, the utilization of ANN in the pyrolysis of the biomass and gasification procedure fields has been narrated in the different works [32–40]. Gue et al. proposed a hybrid modeling scheme comprising the multi-layer artificial neural network to forecast the output products and composition of each gas in the exit stream in the fluidized bed gasifier in the presence of the steam in atmospheric conditions. Xiao et al. [32] used ANN for the parameter's prognostication of the municipal waste biomass gasification process. Souza et al. [33] developed an ANN-based method for gasification modeling using a fluidized bed gasifier and various biomass contents in different circumstances. In another work, Sreejith et al. [34] described the capability of the ANN models in the gasification modeling. Puig et al. applied ANN for forecasting the composition of the gas in product flow in the circular bubbling fluidized bed gasifier. The hydrogen yield from the pyrolysis of the waste contents was evaluated using the ANN model by Karaci et al. [35]. Sun et al. [36] developed an ANN model for the prediction of gas composition in the gaseous product of industrial waste gasification. Pandey et al. [37] predicted the lower calorific value of gaseous components in the waste pyrolysis by applying the ANN-based method. Moreover, Aydinli et al. [38] applied the ANN method for the prediction of the gasification procedure and energy potentiality of the biomass. Sunphorka et al. [39] stated the application of the ANN to predict the kinetic values of biomass from its components. Baruah et al. [40] used ANN modeling for the prediction of the gas yield in a fixed bed downdraft gasifier. Besides the reported literature review, for coal gasification,

ANN modeling is used in various papers [41–43]. Li et al. [44] used PSO-optimized back propagation neural network (BPNN) to assess the gas components in the gaseous flow of coal gasification in a fluidized bed gasification plant.

From the literature review, there are a few cases of MLP-based models that have been used for the modeling and identification of biomass gasification in fixed bed downdraft gasifiers. In the present work, the multi-layer perceptron neural network is applied for the modeling of the biomass gasification in the fixed-bed downdraft types of gasifiers since there is a relatively small number of neural network applications in the field of biomass gasification, especially in the case of the fixed-bed downdraft gasifiers. The downdraft gasifiers are the most-used type of gasifiers that are generally utilized in small-scale applications.

## 2. Biomass gasification process

Gasification is a process that includes a series of chemical phenomena, including drying, pyrolysis or thermal decomposition, oxidation, and reduction. The drying process is the step in which the biomass moisture content decreases. The process occurs in a medium with a temperature in the range of [100, 200 °C], and the moisture content reduces to lower than 5%. The next step is the pyrolysis or decomposition process, in which the breakdown of the raw materials occurs in the absence of air or oxygen. The output composition of this step includes  $CO$ ,  $H_2$ ,  $CO_2$ , hydrocarbon gases, and solid charcoal. The hydrocarbon gases then condense to the liquid tar. Then, the released gases from the previous steps pass the oxidation stage based on the gasification type. Solid forms of carbonized biomass oxidize to carbon dioxide, and the hydrogen also burns into water. The oxidation reaction is an exothermic reaction that provides the heat for three other steps in the gasification process. The next zone in the gasification is reduction reactions that occur in a temperature range of 800,1000°C and is an endothermic process [45]. The most important reactions occur in the reaction zone comprising the following reactions:



There are various types of gasifiers, including fixed-bed, fluidized-bed, and entrained suspension gasifiers [46]. The fixed-bed gasifiers are also comprising some models such as updraft, downdraft, and cross-flow gasifiers [47]. In this study, a fixed-bed downdraft gasifier is employed for detailed analysis. Fig. 1 illustrates a schematic of a fixed-bed downdraft gasifier.



Fig. 1. Schematic of fixed-bed downdraft gasifier.

## 3. Prediction methodology

Simulation and modeling provide an excellent opportunity to determine the key parameters' effect on system performance. In this regard, intelligent methods provide lower computational costs and higher accuracy. Artificial neural networks can model complex nonlinear models. A Multi-Layer Perceptron Neural Network (MLPNN) is proposed for a fixed-bed downdraft gasifier to investigate the gasifier gas composition.

### 3.1. Multi-Layer Perceptron Neural Network methodology

Multi-Layer Perceptron Neural Network (MLPNN) is one of the robust neural networks applied for highly nonlinear systems. Also, the MLP neural network is a feed-forward network capable of nonlinear fittings with higher precision [48–52].

For the formulation of the MLP, the number of input neurons is considered  $n$ , the number of hidden layer neurons is regarded as  $h$ , and the number for the output layers node is given  $m$ . The weighted summation of the input layer is presented as follows:

$$s_j = \sum_{i=1}^n (w_{ij}x_i) - \theta_j, \quad j = 1, 2, \dots, h \quad (1)$$

Herein,  $w_{ij}$  is the connection weight of  $i^{th}$  node in the input layer and the  $j^{th}$  node of the hidden layer, The  $\theta_j$  denotes the  $j^{th}$  node's bias in the hidden layer, and  $x_i$  stands for the  $i^{th}$  input.

The following equation defines the output of a node in the hidden layer.

$$S_j = \text{sigmoid}(s_j) = \frac{1}{1 + e^{-s_j}}, \quad j = 1, 2, \dots, m \quad (2)$$

Following the calculation of the hidden layer output, the final output values are determined as the latter relation.

$$o_k = \sum_{j=1}^h w_{jk}S_j - \theta'_k, \quad k = 1, 2, \dots, m \quad (3)$$

$$O_k = \text{sigmoid}(o_k) = \frac{1}{1 + e^{-o_k}}, \quad k = 1, 2, \dots, m \quad (4)$$

Therein,  $w_{ijk}$  is the connection weight of  $j^{th}$  node in the hidden layer and the  $k^{th}$  node of the output layer and The  $\theta'_k$  denotes the  $k^{th}$  node's bias in the output layer. The weight function and bias of the layers are the key parts of the MLP.

Training a neural network is an essential process to find the optimal values of weights and bias matrices. The most appropriate training method for the feed-forward neural network is the back-propagation algorithm. The nodes in the back-propagation network are organized in layers and each layer's output creates the input of the succeeding layer [49]. Three layers of MLP (input, hidden, and output) are linked within the network parameters, including weights and biases. Different training algorithms are selected for the training of the MLP. The algorithms used for the training aims in the present work comprise Conjugate Gradient, Gradient Descent, and Bayesian Adjustment for Confounding, and Levenberg-Marquardt algorithms [50].

### 3.2. Performance evaluation and stopping metrics for MLP

Various performance criteria can be used for the determination of the MLP neural networks. Evaluation of errors and analyzing the difference between experimental and modeling data are the most conventional indicators for stopping. In the present work, the statistical parameters include the correlation coefficient ( $R^2$ ), Root Mean Squared

Error ( $RMSE$ ), and Average Absolute Relative Error ( $AARE$ ) are adopted to evaluate the MLP performance [51].

The correlation factor is defined as the following equation:

$$R = \frac{1}{N-1} \sum_{i=1}^N \left( \frac{Y_i^{Exp} - \bar{Y}}{St^{Exp}} \right) \left( \frac{Y_i^{MLP} - \bar{Y}}{St^{MLP}} \right) \quad (5)$$

The squared correlation coefficient is defined as follows:

$$R^2 = \frac{\sum_{i=1}^N (Y_i^{Exp} - \bar{Y})^2 - \sum_{i=1}^N (Y_i^{Exp} - Y_i^{MLP})^2}{\sum_{i=1}^N (Y_i^{Exp} - \bar{Y})^2} \quad (6)$$

Herein,  $Y_i^{Exp}$  stands for the experimental values,  $\bar{Y}$  represents the average of the empirical value,  $Y_i^{MLP}$  is the values calculated from the MLP neural network, and  $N$  is the number of samples.

The Root Mean Squared Error is given by:

$$RMSE = \sqrt{\frac{\sum_{i=1}^N (Y_i^{Exp} - Y_i^{MLP})^2}{N}} \quad (7)$$

Also, for better analysis of the MLP effect on the forecasting process, the normalized RMSE metric is presented as follows:


$$NRMSE = \frac{\sqrt{\frac{\sum_{i=1}^N (Y_i^{Exp} - Y_i^{MLP})^2}{N}}}{Y_{max} - Y_{min}} \quad (8)$$

According to the stopping criteria, the lowest values of  $NRSME$  and  $RSME$  are the most desirable, while the highest values of  $R^2$  is acceptable. The highest value of the  $R^2$  is one, so the values adjacent to one show the higher performance of the network.

### 3.3. Multi-layer perceptron flowchart

In this subsection, the MLP neural network is presented. Fig. 2 illustrates the MLP flowchart. Hidden layers' numbers and neurons number in the hidden layers are the key parameters in the multi-layer perceptron neural network. These numbers must be selected so that the over-fitting and under-fitting are avoided. Hence, the neural network structure should be designed with the lowest number of neurons.

## MLP Training and testing Flowchart

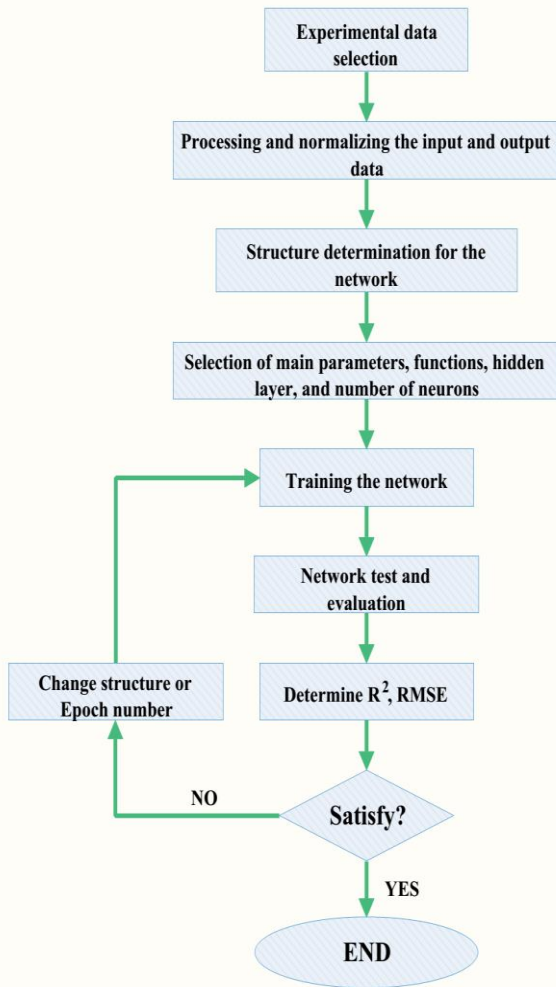

**Fig. 2.** Training, testing, and validation flowchart of MLP neural network.

### 3.4. Data acquisition for simulation

The data used for the simulation of the downdraft fixed-bed gasifier parameters comprises a dataset from various empirical execution of wood gasification. The variables are used as the input values for the formulation of MLP are Moisture content (MC), ash content, Carbon content, Hydrogen content, and Oxygen content, as well as the temperature of the reduction phase ( $T_R$ ) [19- 35]. Table 1 presents the input and output parameters in the MLP-based model.

**Table 1.** Input and output variable bounds.

variable	range
<b>Input</b>	
$C$ (wt % , dry basis)	[43.83, 53.40]
$H$ (wt % , dry basis)	[5.42, 7.18]
$O$ (wt % , dry basis)	[37.24, 45.83]
Ash (wt % , dry basis)	[4.20, 14.70]
$MC$ (wt % , dry basis)	[43.83, 53.40]
$T_R$ (°C)	[600, 1206]
<b>Output</b>	
$CO$ (%)	[10.83, 24.00]
$CH_4$ (%)	[2.00, 6.91]
$CO_2$ (%)	[9.30, 19.00]
$H_2$ (%)	[10.02, 23.93]

### 3.5. Network training, validation, and testing

Using the Multi-Layer Perceptron neural network model, the experimental datasets were applied to model the output gas composition. The data collections were randomly segmented into three parts. The first part of the dataset comprising 70 % was applied for training the network, the second part, including 15%, was used for validation, and the third part of datasets containing 15% was adopted for testing. Algorithms like Conjugate Gradient, Gradient Descent, Bayesian Adjustment for Confounding, and Levenberg-Marquardt were used to train the Multi-Layer Perceptron neural network model. Fig. 3 illustrates the application of the various algorithm to the MLP neural network. Based on Fig. 3, the optimum optimizing algorithm is the Levenberg-Marquardt method that is running based on the TRAINLM function. Various structures for the MLP can be defined by the aim of the assessment factors. However, the best case for the MLP structure is selected. The best structure for the MLP Model consists of an input layer with six different parameters, including  $C$ ,  $O$ ,  $H$ ,  $MC$ , ash, and  $TR$  and a hidden layer with five neurons and an output layer with four different variables comprising  $CH_4$ ,  $CO$ ,  $CO_2$ , and  $H_2$  percent. Fig.4 shows the MLP neural network architecture.

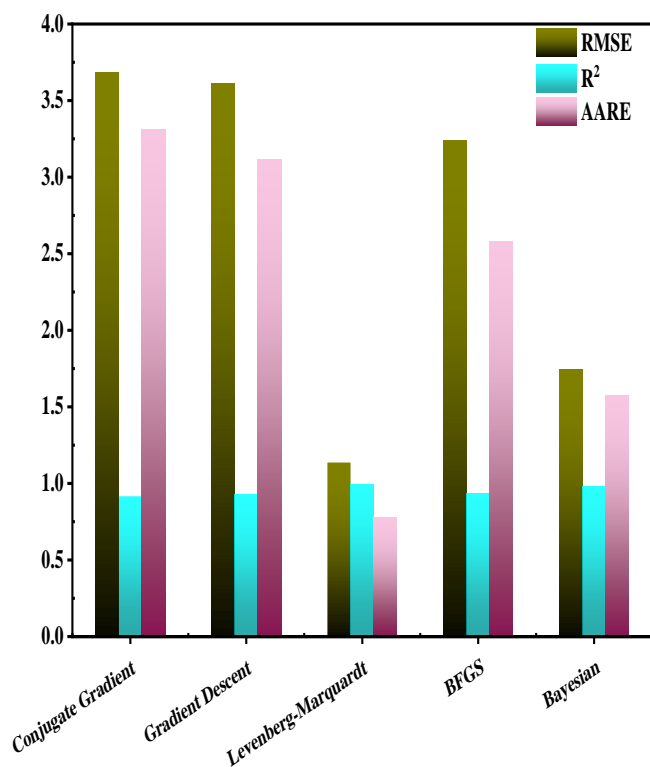


Fig. 3. Evaluation metrics for the different algorithms.


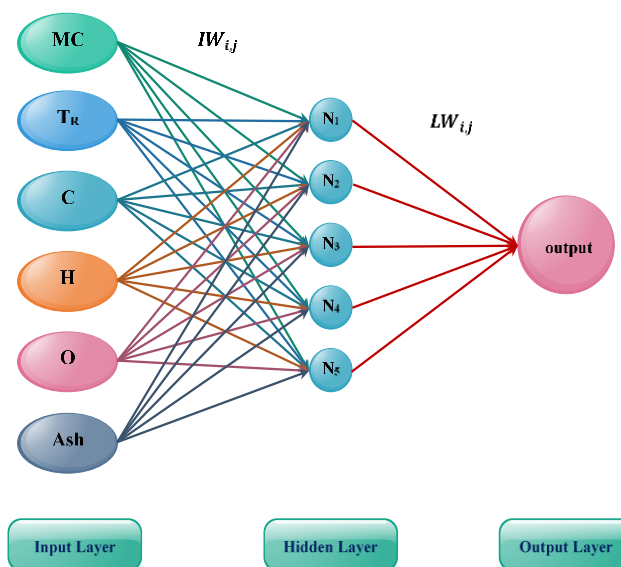



Fig. 4. MLP configuration for forecasting the output composition.

#### 4. Results and discussion


The modeling and laboratory results are plotted in Fig. 5 and show a satisfactory agreement based on the regression criteria for output components, i.e.,  $CO_2$ ,  $H_2$ ,  $CH_4$ , and  $CO$ . As can be seen, the correlation coefficient ( $R^2$ ) for  $CH_4$  and  $CO$  is greater than 0.99 while this value is greater than 0.98 for  $CO_2$  and  $H_2$ . Moreover, the Root Mean Squared Error (RMSE) values for  $CO$ ,  $CH_4$ ,  $H_2$ , and  $CO_2$  were found 0.0675, 0.0527, 0.0925, and 0.0885, respectively.

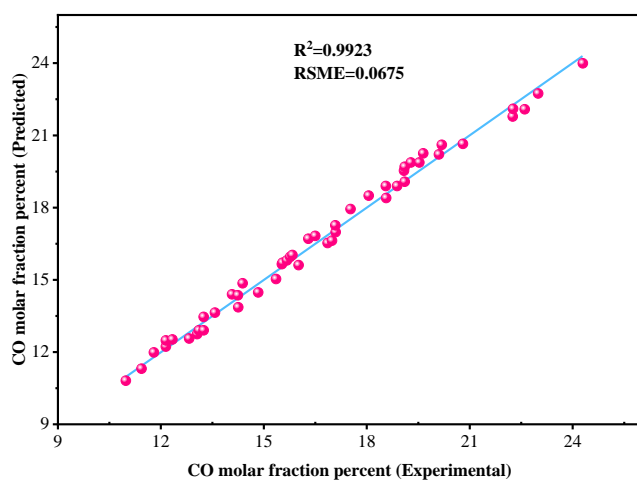


(a)

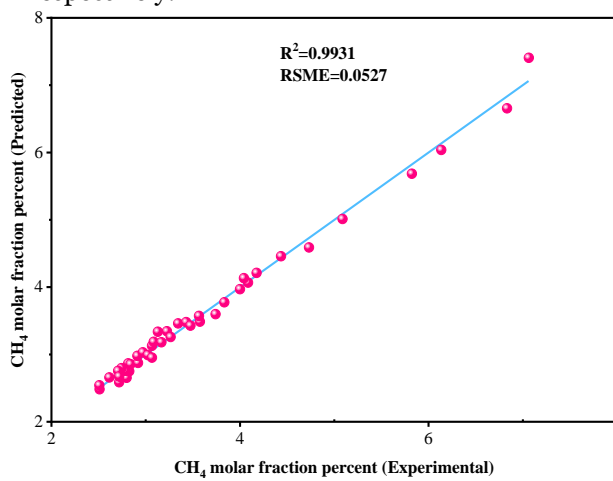

(b)

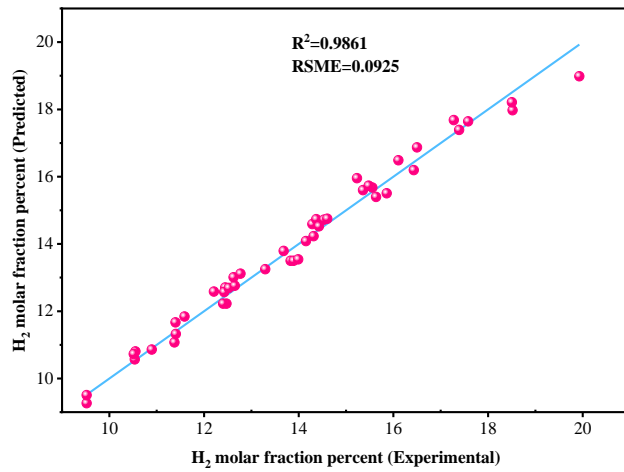


(c)

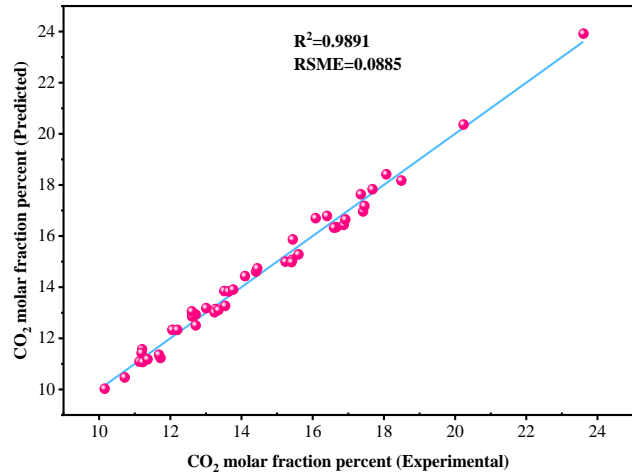

(d)

**Fig. 5.** Empirical data vs. predicted data by MLP model.


A comparison between modeling and experimental data is illustrated in Fig. 6, in which a good agreement between the empirical and modeling data is obvious. The average relative error between the experimental and modeling data is around 2.64 %. As can be seen, the best agreement with the lowest relative error belongs to the  $CO_2$ .

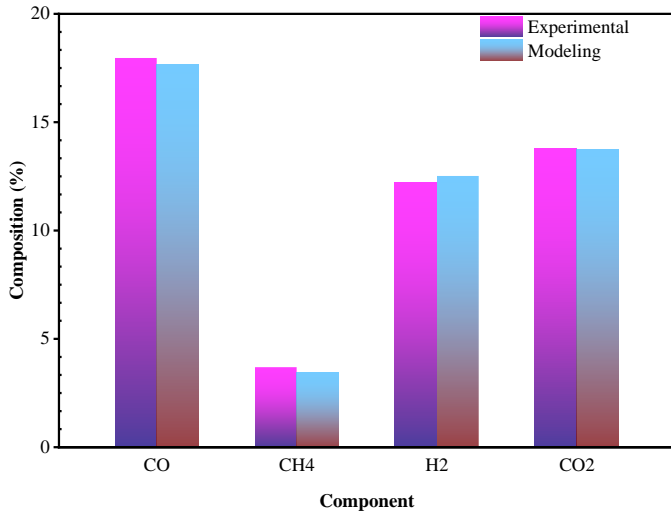

**Fig. 6.** Comparison between empirical and modeling data for major gas components.

Fig. 7 presents the effect of input parameters ( $C$ ,  $O$ ,  $H$ ,  $MC$ , ash, and  $T_R$ ) on the outputs ( $CO_2$ ,  $H_2$ ,  $CH_4$ , and  $CO$ ) composition. Based on Fig. 7, the reduction temperature ( $T_r$ ) has the highest impact on the output yield of the  $CO$  and  $H_2$  and ranked second in effect on the  $CH_4$  and  $CO_2$  prediction. Moisture Content ( $MC$ ) was known to have the same effect on the  $CO$ ,  $CH_4$ , and  $H_2$  while it has a greater influence on the  $CO_2$  yield.  $H$  content in the biomass (% wt)

was found in the second rank in effect on the  $CO$  yield, in the third rank in effect on the  $H_2$  yield, while ranked fourth in the case of  $CO_2$  and  $CH_4$ . Ash content in the dry biomass has the highest impact on the  $CH_4$  prediction, while in the case of the  $CO_2$ , the highest impact belongs to  $C$ . Greater ash content may result in some side effects, for instance: fouling, agglomeration, and gasifier corrosion.

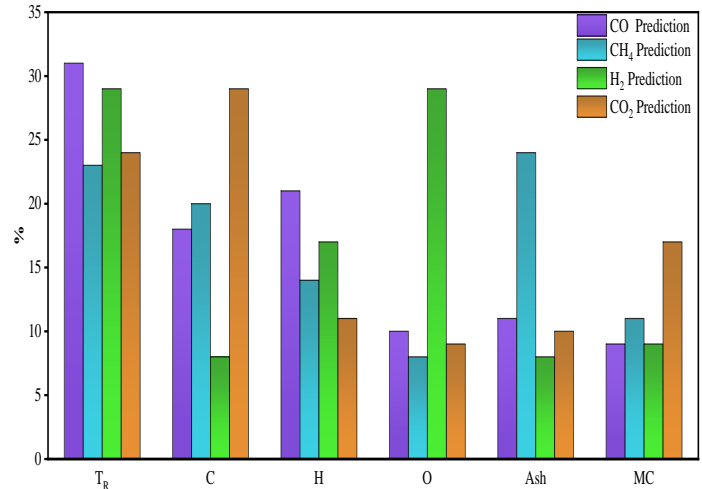

**Fig. 7.** Input variables effect on the gas yield.

In addition, the obtained results using the proposed MLP structure are compared with two other well-known neural networks to validate the efficiency of the proposed method for the case of gasification yield prediction. Table 2 lists the obtained results for all methods, which demonstrates the higher efficiency of the proposed MLP structure.

**Table 2.** Different criteria of various methods to evaluate the prediction precision

Method	Yield	$R^2$	RMSE	NRMSE
RBF neural network	$CO$	0.9747	0.0694	0.5269
	$CH_4$	0.9836	0.0603	1.2281
	$CO_2$	0.9584	0.0894	0.9216
	$H_2$	0.9894	0.0904	0.6499
Artificial neural network	$CO$	0.9865	0.0749	0.5687
	$CH_4$	0.9757	0.0583	1.1873
	$CO_2$	0.9902	0.0857	0.8835
	$H_2$	0.9684	0.0987	0.7096
Proposed MLP	$CO$	0.9923	0.0675	0.5125
	$CH_4$	0.9931	0.0527	1.0733
	$CO_2$	0.9891	0.0885	0.9123
	$H_2$	0.9861	0.0925	0.6650

## 5. Conclusion

There are a few studies of MLP neural network-based simulations of the biomass gasification process. An MLP model is proposed to evaluate the biomass properties and also operational circumstances according to the empirical datasets. The evaluation of the statistical criteria showed that the efficiency of the proposed model is satisfactory. The satisfactory efficiency of the developed model is also a metric that reveals the choice of parameters for the input layer was proper. Forecasting the gas yield in the gasifier exit with six different input variables in the input layer and with five neurons in the hidden layer by applying the back-propagation algorithm has been proposed. The proposed MLP neural network revealed a good agreement with a squared regression coefficient greater than 0.99 for the  $CH_4$  and  $CO$  prediction while this value for the  $CO_2$  and  $H_2$  is obtained greater than 0.98. Based on the study, there are different parameters that influence the gas composition in the gasifier outlet. The reduction temperature ( $T_r$ ) had the greatest effect on the output yield of the  $CO$  and  $H_2$  and ranked second in effect on the  $CH_4$  and  $CO_2$  prediction. Forecasted values also trace the empirical trend based on the reduction temperature variation. The proposed MLP model with prosperous generalization abilities is a helpful

method in mapping biomass gasification and evaluating the overall gasifier efficiency.

## REFERENCES

- [1] Rostamzadeh H, Ebadollahi M, Ghaebi H, Shokri A. Comparative study of two novel micro-CCHP systems based on organic Rankine cycle and Kalina cycle. *Energy Convers Manag* 2019; 183:210–29.
- [2] Ziapour BM, Saadat M, Palideh V, Afzal S. Power generation enhancement in a salinity-gradient solar pond power plant using thermoelectric generator. *Energy Convers Manag* 2017; 136:283–93.
- [3] Hossain MA, Jewaratnam J, Ganesan P. Prospect of hydrogen production from oil palm biomass by thermochemical process—A review. *International Journal of Hydrogen Energy* 2016; 41:16637–55.
- [4] Yang H, Yan R, Chen H, Lee DH, Zheng C. Characteristics of hemicellulose, cellulose and lignin pyrolysis. *Fuel* 2007; 86:1781–8.
- [5] Basu P. Biomass gasification and pyrolysis: practical design and theory. Academic press; 2010.
- [6] Balat H, Kırtay E. Hydrogen from biomass—present scenario and future prospects. *Int J Hydrogen Energy* 2010; 35:7416–26.
- [7] Hosseini SE, Abdul Wahid M, Jamil MM, Azli AAM, Misbah MF. A review on biomass-based hydrogen production for renewable energy supply. *Int J Energy Res* 2015; 39:1597–615.
- [8] Nowotny J, Hoshino T, Dodson J, Atanacio AJ, Ionescu M, Peterson V, et al. Towards sustainable energy. Generation of hydrogen fuel using nuclear energy. *International Journal of Hydrogen Energy* 2016; 41:12812–25.
- [9] Nikolaidis P, Poullikkas A. A comparative overview of hydrogen production processes. *Renewable and Sustainable Energy Reviews* 2017; 67:597–611.
- [10] Sikarwar VS, Zhao M, Clough P, Yao J, Zhong X, Memon MZ, et al. An overview of advances in biomass gasification. *Energy & Environmental Science* 2016; 9:2939–77.
- [11] Abuadala A, Dincer I, Naterer GF. Exergy analysis of hydrogen production from biomass gasification. *International Journal of Hydrogen Energy* 2010; 35:4981–90.
- [12] Parthasarathy P, Narayanan KS. Hydrogen production from steam gasification of biomass: influence of process parameters on hydrogen yield—a review. *Renew Energy* 2014; 66:570–9.
- [13] Alauddin ZABZ, Lahijani P, Mohammadi M, Mohamed AR. Gasification of lignocellulosic biomass in fluidized beds for renewable energy development: A review. *Renewable and Sustainable Energy Reviews* 2010; 14:2852–62.
- [14] Ahmad AA, Zawawi NA, Kasim FH, Inayat A, Khasri A. Assessing the gasification performance of biomass: A review on biomass gasification process



- conditions, optimization and economic evaluation. *Renewable and Sustainable Energy Reviews* 2016; 53:1333–47.
- [15] Sikarwar VS, Zhao M, Clough P, Yao J, Zhong X, Memon MZ, et al. An overview of advances in biomass gasification. *Energy & Environmental Science* 2016; 9:2939–77.
- [16] Delgado J, Aznar MP, Corella J. Biomass gasification with steam in fluidized bed: effectiveness of CaO, MgO, and CaO–MgO for hot raw gas cleaning. *Industrial & Engineering Chemistry Research* 1997; 36:1535–43.
- [17] Duman G, Uddin MA, Yanik J. The effect of char properties on gasification reactivity. *Fuel Processing Technology* 2014; 118:75–81.
- [18] Baruah D, Baruah DC. Modeling of biomass gasification: A review. *Renewable and Sustainable Energy Reviews* 2014; 39:806–15.
- [19] Ahmed TY, Ahmad MM, Yusup S, Inayat A, Khan Z. Mathematical and computational approaches for design of biomass gasification for hydrogen production: A review. *Renewable and Sustainable Energy Reviews* 2012; 16:2304–15.
- [20] Puig-Arnavat M, Bruno JC, Coronas A. Review and analysis of biomass gasification models. *Renewable and Sustainable Energy Reviews* 2010; 14:2841–51.
- [21] Mahishi MR, Goswami DY. Thermodynamic optimization of biomass gasifier for hydrogen production. *International Journal of Hydrogen Energy* 2007; 32:3831–40.
- [22] Karmakar MK, Datta AB. Generation of hydrogen rich gas through fluidized bed gasification of biomass. *Bioresour Technol* 2011; 102:1907–13.
- [23] Xue Q, Fox RO. Reprint of: Multi-fluid CFD modeling of biomass gasification in polydisperse fluidized-bed gasifiers. *Powder Technol* 2014; 265:23–34.
- [24] Mikulandrić R, Lončar D, Böhning D, Böhme R, Beckmann M. Artificial neural network modelling approach for a biomass gasification process in fixed bed gasifiers. *Energy Convers Manag* 2014; 87:1210–23.
- [25] Puig-Arnavat M, Hernández JA, Bruno JC, Coronas A. Artificial neural network models for biomass gasification in fluidized bed gasifiers. *Biomass and Bioenergy* 2013; 49:279–89.
- [26] Guo B, Li D, Cheng C, Lü Z, Shen Y. Simulation of biomass gasification with a hybrid neural network model. *Bioresour Technol* 2001; 76:77–83.
- [27] Kalogirou SA. Artificial neural networks in renewable energy systems applications: a review. *Renewable and Sustainable Energy Reviews* 2001; 5:373–401.
- [28] Wang J, Wan W. Application of desirability function based on neural network for optimizing biohydrogen production process. *Int J Hydrogen Energy* 2009; 34:1253–9.
- [29] Rosales-Colunga LM, García RG, Rodríguez ADL. Estimation of hydrogen production in genetically modified *E. coli* fermentations using an artificial neural network. *International Journal of Hydrogen Energy* 2010; 35:13186–92.
- [30] Nasr N, Hafez H, el Naggat MH, Nakhla G. Application of artificial neural networks for modeling of biohydrogen production. *International Journal of Hydrogen Energy* 2013; 38:3189–95.
- [31] Zamaniyan A, Joda F, Behroozsarand A, Ebrahimi H. Application of artificial neural networks (ANN) for modeling of industrial hydrogen plant. *International Journal of Hydrogen Energy* 2013; 38:6289–97.
- [32] Xiao G, Ni M, Chi Y, Jin B, Xiao R, Zhong Z, et al. Gasification characteristics of MSW and an ANN prediction model. *Waste Management* 2009; 29:240–4.
- [33] de Souza MB, Couceiro L, Barreto AG, Quitete CPB. Neural network based modeling and operational optimization of biomass gasification processes. *Gasification for Practical Applications* 2012:297–312.
- [34] Sreejith CC, Muraleedharan C, Arun P. Performance prediction of fluidised bed gasification of biomass using experimental data-based simulation models. *Biomass Conversion and Biorefinery* 2013; 3:283–304.
- [35] Karaci A, Caglar A, Aydinli B, Pekol S. The pyrolysis process verification of hydrogen rich gas (H-rG) production by artificial neural network (ANN). *Int J Hydrogen Energy* 2016; 41:4570–8.
- [36] Karaci A, Caglar A, Aydinli B, Pekol S. The pyrolysis process verification of hydrogen rich gas (H-rG) production by artificial neural network (ANN). *Int J Hydrogen Energy* 2016; 41:4570–8.
- [37] Pandey DS, Das S, Pan I, Leahy JJ, Kwapinski W. Artificial neural network-based modelling approach for municipal solid waste gasification in a fluidized bed reactor. *Waste Management* 2016; 58:202–13.
- [38] Aydinli B, Caglar A, Pekol S, Karaci A. The prediction of potential energy and matter production from biomass pyrolysis with artificial neural network. *Energy Exploration & Exploitation* 2017; 35:698–712.
- [39] Sunphorka S, Chalermssinsuwan B, Piumsomboon P. Artificial neural network model for the prediction of kinetic parameters of biomass pyrolysis from its constituents. *Fuel* 2017; 193:142–58.
- [40] Baruah D, Baruah DC, Hazarika MK. Artificial neural network-based modeling of biomass gasification in fixed bed downdraft gasifiers. *Biomass and Bioenergy* 2017; 98:264–71.
- [41] Guo B, Shen Y, Li D, Zhao F. Modelling coal gasification with a hybrid neural network. *Fuel* 1997; 76:1159–64.
- [42] Nougues JM, Pan YG, Velo E, Puigjaner L. Identification of a pilot scale fluidised-bed coal gasification unit by using neural networks. *Appl Therm Eng* 2000; 20:1561–75.
- [43] Chavan PD, Sharma T, Mall BK, Rajurkar BD,

- Tambe SS, Sharma BK, et al. Development of data-driven models for fluidized-bed coal gasification process. *Fuel* 2012; 93:44–51.
- [44] Li G, Liu Z, Li J, Fang Y, Shan J, Guo S, et al. Modeling of ash agglomerating fluidized bed gasifier using back propagation neural network based on particle swarm optimization. *Applied Thermal Engineering* 2018; 129:1518–26.
- [45] Patra TK, Sheth PN. Biomass gasification models for downdraft gasifier: A state-of-the-art review. *Renewable and Sustainable Energy Reviews* 2015; 50:583–93.
- [46] Salaiques E. Catalytic steam gasification of biomass surrogates: a thermodynamic and kinetic approach 2010.
- [47] Chaiwat W, Hasegawa I, Mae K. Examination of the low-temperature region in a downdraft gasifier for the pyrolysis product analysis of biomass air gasification. *Ind Eng Chem Res* 2009; 48:8934–43.
- [48] Du K-L, Swamy MNS. Neural networks in a softcomputing framework. vol. 501. Springer; 2006.
- [49] Hassoun MH. Fundamentals of artificial neural networks. MIT press; 1995.
- [50] Chong EKP, Zak SH. An introduction to optimization. John Wiley & Sons; 2004.
- [51] Esmaeilzadeh F, Lashkarboluki R, Lashkarbolooki M, Zeinolabedini Hezave A. Modeling of spearmint oil extraction in a packed bed using SC-CO<sub>2</sub>. *Chemical Engineering Communications* 2014; 201:300–22.
- [52] Ansari HR, Zarei MJ, Sabbaghi S, Keshavarz P. A new comprehensive model for relative viscosity of various nanofluids using feed-forward back-propagation MLP neural networks. *International Communications in Heat and Mass Transfer* 2018; 91:158–64.